



NELMOR-GRANULATE

GP 1000 SERIES BESIDE-THE-PRESS GRANULATORS



GP1012 AND GP1018 SERIES

The GP1012 and 1018 Series granulators are designed for efficient beside-the-press regrind of reject components from injection molding, blow molding, and extrusion processes. Quiet-running and extremely versatile, they can be used with robot feed, conveyor feed or hand feed applications.

These sound-attenuating granulators are available in two models - 10x12 and 10x18. Both provide excellent quality regrind with the added advantage of reduced maintenance costs.

STANDARD FEATURES

- Hopper
 - Hand, robot or conveyor operation
 - Sound attenuated
 - Multi-feed
- Cutting Chamber
 - Offset design, 2 bed knives
 - Machined, bolted and doweled
 - Fully sound-attenuated to approximately 70-80 dBA
- 3-Knife Rotor
 - Open-scooped with rotating end discs
- Quick-Release Hand Knob Access
- Rotor and Bed Knives
 - D2 OEM manufactured
 - Proprietary process
- Removable pivoting drop-down screen and screen cradle
 - 1/4" standard, 3/16", 5/16", 3/8" and other sizes available
- 5 HP TEFC Motor and solid flywheel drive
- Standard metal bin discharge

OPTIONS

- Motor: 7.5 to 15 HP (5.625 to 11.25 kW) TEFC motors
- Discharges:
 - 1.25", 1.5" or 2.5" vacuum takeoff
 - 4" blower discharge
- Knives:
 - D2 components and wear-resistant package for abrasive applications



1100 E Woodfield Road
Schaumburg, IL 60173 USA
Tel. 847-273-7700 Fax 847-273-7804

www.aecinternet.com



**WHITLOCK/
MATERIAL
HANDLING**



HEAT & COOL



**BLEND &
RECLAIM**



**NELMOR/
GRANULATE**



**DOWNSTREAM
EXTRUSION**



AUTOMATE



**SYSTEMS
CONTRACTING**




SERVICE



NELMOR-GRANULATE

GP 1000 SERIES BESIDE-THE-PRESS GRANULATORS

Selector Guide		
Model	GP1012	GP1018
Cutting Circle	10" (254.0 mm), 426 rotor rpm	
Throughput	450 lbs/hr (204.5 kg/hr)	550 lbs/hr (249.5 kg/hr)
Cutting Chamber	10" x 12" (254 mm x 304.8 mm)	10" x 18" (254 mm x 457.2 mm)
Rotor Knives	3 knife open-scooped with rotating end discs	
Discharge	Bin standard	
Motor	5 HP (3.75 kW) TEFC standard	
Drive Parts	Flywheel/rotor (solid), drive belts, taper lock bearings, and adjustable motor base	
Base	Sound-enclosed base, caster-mounted for bin enclosure	
Electrical Components	Start/stop button, complete set of safety interlocks	
Controls	NEMA Type 12	
Feed Height	49.44" (1255.8 mm)	
Overall Height	58.25" (1479.6 mm)	
Overall Length	44.5" (1130.3 mm)	
Overall Width (A)	29.875" (758.8 mm)	35.875" (911.2 mm)
Weight	1275 lbs (578.3 kg)	1440 lbs (653.2 kg)

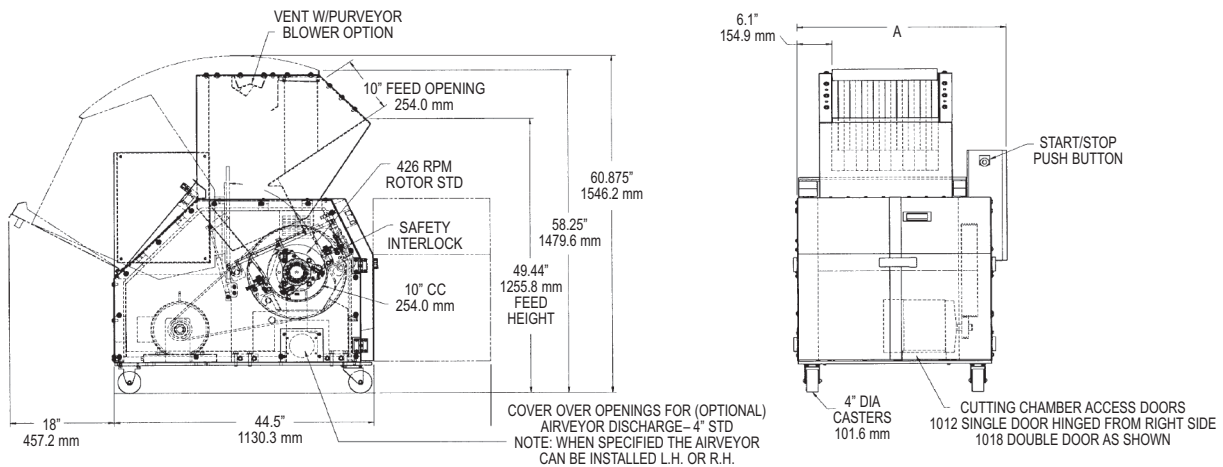

1100 E Woodfield Road
Schaumburg, IL 60173 USA
Tel. 847-273-7700 Fax 847-273-7804

